

IN01-A

Fingerprint Time Attendance & Access Control Terminal



IN01-A is a 2.8-inch TFT screen Time Attendance & Access Control Terminal. Adopting the new user-friendly firmware and latest core-board improves performance, accelerates identification speed and has more expansibility for various customization requirements. What's more, the user-friendly interface brings you a new experience. An optional 2000mAh backup battery can eliminate the trouble of power failure. RS232/485, TCP/IP, USB-host and optional Wi-Fi, 3G/4G ensure a smooth data transmission between device and PC.

The IN01-A has access control interface for Wiegand-in, Wiegand-out, door lock, alarm and bell.

Features

Remarkable User Experience

- Intuitive and stunning UI designed with the most popular and internationalized element.
- Interface operation adopts modularized hierarchical design. Simpler, better and more logical.
- Great user interactivity.

Enhanced Features and Performance

- Multi-languages.
- Data backup and retrieve.
- Advanced User ID consisted of letters and numbers.
- Chip encryption for firmware protection.
- Faster matching speed: Less than 0.5 second.
- Optional Wi-Fi/3G/4G.

Excellent Expandability

- Easy to extend functions and customize customers' requirements.


Access Control Interface

- For Wiegand in and out, door lock connection, alarm and bell.


Specifications

Fingerprint Capacity	3,000
Card Capacity	10,000 (Optional)
Record Capacity	100,000
Display	2.8-inch TFT Screen
Communication	TCP/IP, Wi-Fi, USB-host / Client(Optional)
Standard Functions	Workcode, SMS, DST, Self-Service Query, Automatic Status Switch, Multiple Verify Modes, Anti-passback
Optional Functions	ID/IC/ HID, 3G/4G, Wi-Fi, Webserver, Photo ID, ADMS, Schedule Bell, External Printer, External Bell, T9 Input, Battery
Access Control Interface	3rd Party Electric Lock, Door Sensor,Exit Button, Alarm, and Door Bell
Wiegand Signal	Input & Output
Software	easy TimePro, BioTime Cloud 2.0, ZKTime.Net
AC Adapter	DC 12V 3A
Verification Speed	°0.5 S ec.
Operating Temp.	0°C to 45°C
Operating Humidity	20% to 80%
Dimension	211.5*159.4*47.8mm (Length*Width*Thickness)


Configuration

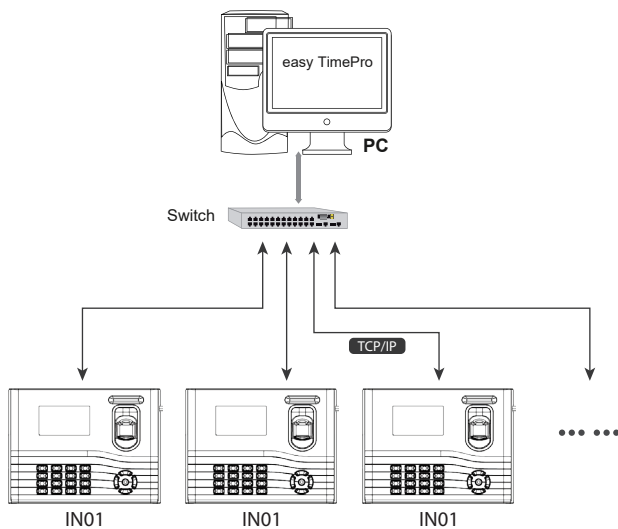

Dimensions (mm)

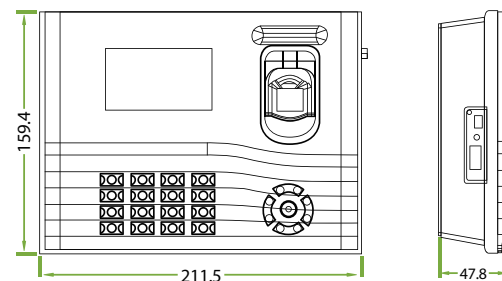

Interface



Package List

